



Levee Analysis and Mapping Plan Portville Local Flood Protection Project

*Town of Portville, Village of Portville,
Cattaraugus County, New York*

August 2020



FEMA

RiskMAP
Increasing Resilience Together

Table of Contents

Acronyms	ii
Definitions.....	iii
Executive Summary	1
1 Introduction.....	3
2 Levee System Descriptions	4
2.1 Portville Local Flood Protection Project (LFPP)	4
2.2 Community NFIP and FIS History	6
2.3 Upper Allegheny River Watershed BLE	6
2.4 Future Detailed Study	6
3 Stakeholder Engagement and Data Collection.....	7
3.1 Local Levee Partnership Team	7
3.2 Data Collection	8
3.3 LLPT Meeting 1	10
3.4 LLPT Meeting 2	10
3.5 LLPT Meeting 3	10
4 Initial Data Analysis	10
4.1 Understanding Existing Conditions	10
4.2 Hydrologic and Hydraulic Analyses.....	11
4.3 Computation of Freeboard	11
4.4 Potential Levee Reach Analysis Procedures.....	12
5 Potential Analysis Methods.....	14
5.1 Sound Reach	14
5.2 Freeboard Deficient	14
5.3 Overtopping	15
5.4 Structural-Based Inundation	15
5.5 Natural Valley Procedure.....	16
6 Path Forward and Next Steps.....	17
7 References.....	19

List of Appendices

Appendix A – Stakeholder Engagement – LLPT Meeting Information
Appendix B – Freeboard Profile Comparison
Appendix C – Levee Accreditation Checklist
Appendix D – Collected Data
Appendix E – Initial Data Analysis

List of Tables

Table 1. Levee System Summary	5
Table 2. Community Map History	6
Table 3. LLPT Participants	7
Table 4. Data Collection Summary	9
Table 5. Levee Data Summary	13

List of Figures

Figure 1: Location Map	5
Figure 2: Natural Valley Procedure, North of Dodge Creek Levee System	16
Figure 3: Natural Valley Procedure, South of Dodge Creek Levee Systems	17

Acronyms

BFE	Base Flood Elevation
BLE	Base Level Engineering
CERC	Community Engagement and Risk Communication
CFR	Code of Federal Regulations
DEM	Digital Elevation Model
FEMA	Federal Emergency Management Agency
FIRM	Flood Insurance Rate Map
FIS	Flood Insurance Study
LiDAR	Light Detection and Ranging
LLPT	Local Levee Partnership Team
LOMR	Letter of Map Revision
NFIP	National Flood Insurance Program
NLD	National Levee Database
NRCS	Natural Resources Conservation Service
NYSDEC	New York State Department of Environmental Conservation
O&M	Operations and Maintenance
PTS	Production and Technical Services
SFHA	Special Flood Hazard Area
STARR II	Strategic Alliance for Risk Reduction
USACE	U.S. Army Corps of Engineers

Definitions

The terms below have been used in this document. Additional terms are provided in FEMA's *Guidance for Flood Risk Analysis and Mapping, Levees* (November 2019) in the Glossary. This guidance document is available from the FEMA Library.

Base Flood Elevation (BFE) – The elevation of a flood having a 1-percent chance of being equaled or exceeded in any given year.

Levee Reach Analysis and Mapping Procedures – Levee mapping procedures for non-accredited levees, which include Sound Reach, Freeboard Deficient, Overtopping Analysis, Structural-Based Inundation, and Natural Valley. Details on these approaches can be found in FEMA's *Guidance for Flood Risk Analysis and Mapping, Levees*.

Leveed Area* – A spatial feature in the National Levee Database defined by the lands from which flood water is excluded by the Levee System.

Levee Impacted Area (for base flood)* – The area landward of a levee system that would be inundated by the corresponding base flood if the flood hazard reduction effect of the levee system is not considered. Often, this area will be identified by applying the Natural Valley Procedure for the levee system.

Levee Reach* – Any continuous section of a levee system to which a single analysis and mapping procedure may be applied.

Levee System* – A flood hazard-reduction system that consists of one or more levee segments and other features, such as floodwalls and pump stations, which are interconnected and necessary to ensure exclusion of the design flood from the associated hydraulically independent leveed area, and which are constructed and operated in accordance with sound engineering practices.

Local Levee Partnership Team (LLPT)* – A work group that FEMA can facilitate when a levee system will be analyzed by levee analysis and mapping procedures for non-accredited levees. The primary function of this group is to share information/data and identify options based on stakeholder roles and knowledge.

National Levee Database (NLD)* – A database developed by the U.S. Army Corps of Engineers (USACE) in cooperation with FEMA, which is a dynamic, searchable inventory of information for all levee systems in the Nation. The NLD contains information to facilitate and link activities, such as flood risk communication, levee system evaluation for the NFIP, levee system inspections, flood plain management, and risk assessments.

Natural Valley Procedure* – Non-accredited levee procedure that can be applied to all non-accredited levee reaches. The Natural Valley Procedure is used in two ways: first landward of the entire levee system to determine the outer limits of any levee impacted Zone D areas, and second as a potential procedure applied to individual levee reaches to determine the SFHA on the landward side of the levee reach. Several factors are considered when determining whether to use the Natural Valley Procedure to determine the SFHA:

- The levee reach does not significantly obstruct the flow of water; Data necessary for more complex methods is not and will not be available in the near term; or

- The community (or tribal entity, when appropriate) provides feedback that it is the acceptable procedure to use. For riverine levee systems, the Natural Valley Procedure reflects the levee geometry in the hydraulic model but allows water to flow on either side of the levee.

Non-Accredited Levee System* – A levee system that does not meet the requirements at Title 44, Chapter 1, Section 65.10 of the Code of Federal Regulations (44 CFR 65.10), *Mapping of Areas Protected by Levee Systems*, and is not shown on a FIRM as reducing base flood hazards.

Zone A – An area inundated by 1-percent-annual-chance flooding, for which no BFEs have been published.

Zone D – Area of possible but undetermined flood hazard.

*Term description from FEMA's *Guidance for Flood Risk Analysis and Mapping, Levees*

Executive Summary

The Portville Local Flood Protection Project (Portville LFPP) was designed and constructed by the U.S. Army Corps of Engineers, Pittsburgh District (USACE) to reduce flood risk to the Town of Portville and the Village of Portville. Two levee systems are part of the Portville LFPP. These levee systems are located along the Allegheny River, Dodge Creek, and Oswayo Creek.

The Federal Emergency Management Agency (FEMA) identifies flood risk and maps flood hazard. The flood risk for the 1-percent-annual-chance flood (base flood) is discussed in the Flood Insurance Study (FIS) report. The flood hazards are mapped on the Flood Insurance Rate Maps (FIRMs). The two levee systems of the Portville LFPP are shown as reducing the base flood hazard on the effective FIRMs for the Town and Village of Portville. The effective FIRMs for the Town of Portville are dated April 17, 1978, and July 18, 1983. The effective FIRM for the Village of Portville is dated April 17, 1978. These FIRMs are the regulatory flood insurance maps.

FEMA Region II plans to modernize the FIS report and FIRMs for Cattaraugus County, New York. These updates will replace locally based FIS reports and FIRMs with digital data for the county. As part of the update process, FEMA Region II is proactively engaging the Town and Village of Portville. Early flood risk identification related to their levee systems is important.

In July 2013, FEMA issued a document titled *Analysis and Mapping Procedures for Non-Accredited Levee Systems New Approach* (FEMA, 2013). The procedures described in this document introduced additional options to analyze and map flood hazards for non-accredited levee systems. These procedures also feature more interactive stakeholder engagement.

In June 2019, FEMA Region II partnered with local, regional, and Federal levee stakeholders to form a Local Levee Partnership Team (LLPT) with the Village of Portville and the Town of Portville. The LLPT coordinated to find potential analysis and mapping procedures to be applied to levee systems. This involved collecting and evaluating available data, completing an initial data analysis, and identifying mapping needs.

This levee plan summarizes that information. The plan outlines potential options to show the flood hazard behind the levee systems on future FIRMs. It also identifies additional data collection needs.

The Town and Village of Portville would like future FIRMs to show the two Portville LFPP levee systems as reducing the base flood hazard. For the two levee systems of the Portville LFPP to be accredited, certified levee data compliant with Title 44, Code of Federal Regulations, Chapter 1, Part 65 Section 10 (44 CFR §65.10) would need to be provided to FEMA. FEMA would need to check the certified levee data for completeness. If the levee certification data is found to be complete, the levee system(s) can be mapped as accredited on the FIRM.

If the levee system(s) are not compliant with the minimum requirements of 44 CFR §65.10, flood hazards behind the levee system(s) may be evaluated using the Analysis and Mapping Procedures for Non-Accredited Levees. This may also require certified levee data that complies with 44 CFR §65.10 and the requirements of the levee reach analysis procedure being considered.

Certified levee data can be submitted to FEMA at any time. The certified levee data should be based on the effective flood study data. Updated certification data would be required if the effective study data is changed and affects a levee system after it has been accredited. Qualified entities seeking accreditation can submit the data to FEMA using the Letter of Map Revision (LOMR) process.

A restudy of the flood risk along the Allegheny River, Dodge Creek, and Oswayo Creek is anticipated in the future. The restudy may supersede the effective flood risk study. Qualified entities seeking accreditation should coordinate with FEMA Region II prior to preparing levee certification data.

If FEMA does not receive certified levee data, or if the data is incomplete, the levee system will not be accredited. Future FIRMs would depict the flood hazard for the levee system based on the Analysis and Mapping Procedures for Non-accredited Levees.

1 Introduction

Under FEMA’s prior levee flood hazard mapping approach, a levee system that did not meet the National Flood Insurance Program (NFIP) requirements (44 CFR §65.10) was analyzed and mapped as if the levee system had no effect on flooding on the landward side of the levee system during the base flood. This was known as the “without levee” approach.

Stakeholders expressed concern about the “without levee” approach. Members of both the U.S. House of Representatives and the Senate echoed this concern and asked FEMA to consider discontinuing the “without levee” approach. FEMA used current modeling techniques to refine its analysis of the flood hazard reduction provided by non-accredited levee systems. This process, known as the “Analysis and Mapping Procedures for Non-Accredited Levee Systems,” recognizes the uncertainty associated with hazard identification for levee-impacted areas by providing multiple options for showing flood hazards.

This approach is being applied to the levee systems along the Allegheny River and Dodge Creek, within the Town and Village of Portville, and along Oswayo Creek in the Town of Portville. Analysis and Mapping Procedures for Non-Accredited Levee Systems activities were initiated by FEMA; its Production and Technical Services (PTS) provider, Strategic Alliance for Risk Reduction II (STARR II); and its Community Engagement and Risk Communication (CERC) provider (*Resilience Action Partners*).

Flood hazards change over time. Conditions within a watershed may also change. Therefore, FEMA periodically assesses the need to update the flood hazard information shown on the effective FIRMs. FEMA funded a Base Level Engineering (BLE) project for the Upper Allegheny River Watershed to help inform future flood hazard mapping projects. This BLE project includes hydrologic and hydraulic analysis for areas the Allegheny River and Dodge Creek in the Town and Village of Portville and Oswayo Creek in the Town of Portville. The BLE project provided flood risk datasets, including flood hazards for the Allegheny River, Dodge Creek, and Oswayo Creek. The results of the BLE project were leveraged for the initial data analysis, discussed in Sections 4 and 5 of this plan. The results of the BLE project can also be used to expand risk awareness discussions with communities.

When a stream with a levee system is restudied, the flood risk associated with the levee system should be reevaluated. FEMA reviews the available information for the levee system to determine the appropriate mapping procedures to apply to the levee-impacted areas landward of the levee. In this case, if the Allegheny River, Dodge Creek, and Oswayo Creek are restudied, the levee systems in the Town and Village of Portville will be reevaluated. FEMA leveraged the BLE project to develop a first-pass estimate of the potential base flood hazard associated with the levee systems along the Allegheny River, Dodge Creek, and Oswayo Creek.

This levee plan is the result of collaboration between FEMA, the Town and Village of Portville, the New York State Department of Environmental Conservation (NYSDEC), Cattaraugus County, USACE, and other stakeholders. The plan summarizes stakeholder coordination, initial data analysis, and potential options for depicting the flood hazard for the levee systems on a future FIRM.

2 Levee System Descriptions

2.1 Portville Local Flood Protection Project (LFPP)

The Allegheny River flows through the Town and Village of Portville from southeast to northwest for approximately 3.5 miles. The Village of Portville is on the east side of the Allegheny River, just downstream of the confluence of the Allegheny River and Oswayo Creek. Dodge Creek flows from northeast to southwest through the Town and Village of Portville. Dodge Creek flows into the Allegheny River downstream of Main Street. Oswayo Creek flows from east to west into the Allegheny River through the Town of Portville. Oswayo Creek is south of the Village of Portville, and its confluence is near the border between the Town and Village of Portville. The Base Flood Elevations (BFEs) along Oswayo Creek are lower than the BFEs for the Allegheny River; therefore, the BFEs of the Allegheny River backwater are used for the downstream inundation area and water surface profile of Oswayo Creek in the Town of Portville FIS.

USACE originally designed the Portville LFPP to reduce flood risk in the Town and Village of Portville. The design flood for the Allegheny River was the July 1942 flood event. The project includes two levee systems, referenced as the North of Dodge Creek and South of Dodge Creek levee systems. The North of Dodge Creek Levee system is an earthen levee system along the east side (right descending) bank of the Allegheny River and the north side (right descending) bank of Dodge Creek. The South of Dodge Creek levee system is along the right descending bank of the Allegheny River, the south side (left descending) bank of Dodge Creek, and the north side (right descending) bank of Oswayo Creek. Construction of the Portville LFPP was completed around 1950.

These two levee systems consist primarily of earthen embankments, but they also include concrete flood walls and a closure structure. Each levee system includes designated ponding areas to collect interior drainage. A pump station is on the north (right) bank of Dodge Creek to convey interior drainage to the creek. Some areas drain by gravity sewers when high river or creek waters recede.

The two levee systems of the Portville LFPP have multiple sponsors with different roles in supporting the levee system. USACE is the Federal stakeholder, NYSDEC is the non-Federal sponsor, and the Village of Portville is the local sponsor. The NYSDEC is responsible for the Operation and Maintenance (O&M) of the levee systems per cooperation agreements with USACE. Front line Emergency Management activities are addressed at the local and county levels.

Information about the levee systems is provided in Table 1 and the levee system alignments are shown in Figure 1.

Table 1. Levee System Summary

Levee System Name	Levee System ID	County	Community	Approximate Total Length of Levee System (ft)	Approximate # of Structures Affected
North of Dodge Creek Levee System	4905000011	Cattaraugus	Town and Village of Portville	12,500 ¹	255 ¹
South of Dodge Creek Levee System	4905000012	Cattaraugus	Town and Village of Portville	10,900 ¹	275 ¹
¹ Data from USACE National Levee Database (NLD)					

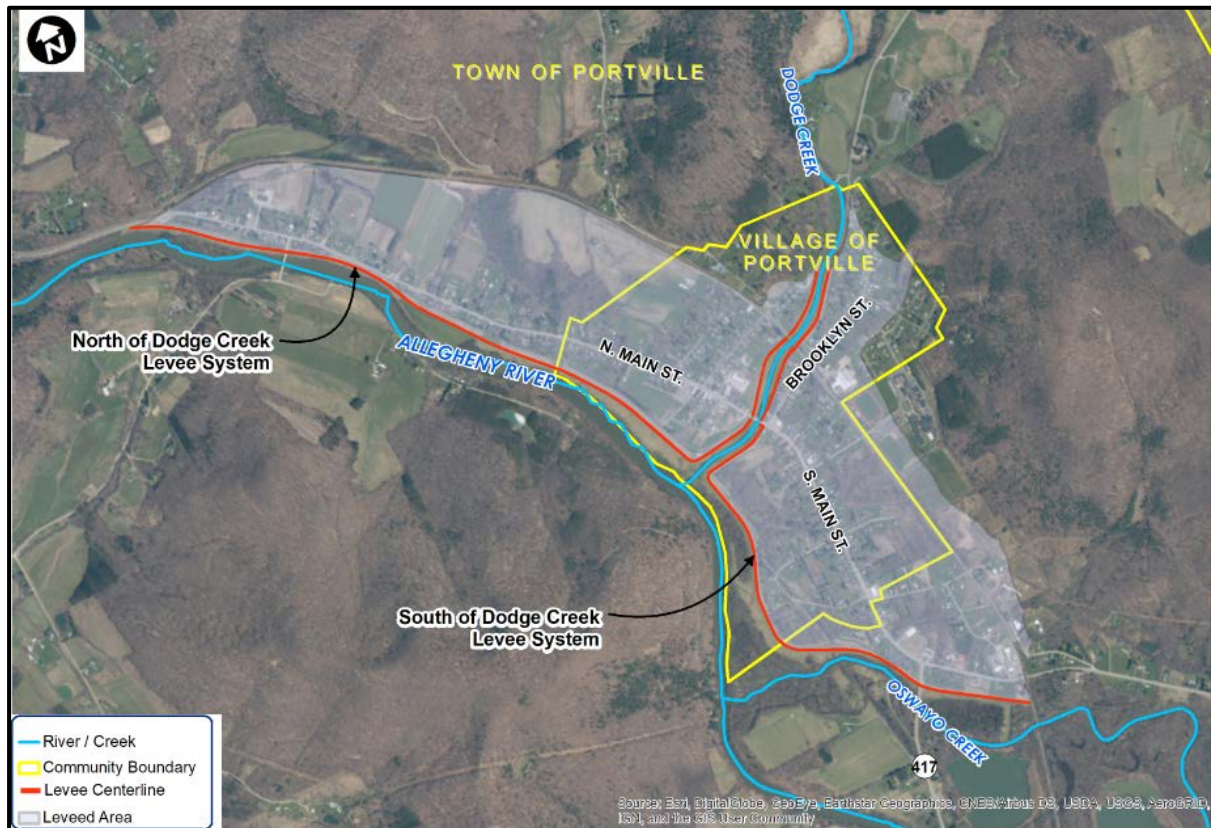


Figure 1: Location Map¹

¹ The levee centerline and leveed area shown are sourced from the NLD. The definition of leveed area is provided in the Glossary of this levee plan.

2.2 Community NFIP and FIS History

Table 2 summarizes the NFIP participation and FIS report history of the Town and Village of Portville.

Table 2. Community Map History

Community Name	Participating in the NFIP?	Initial Identification	Flood Hazard Boundary Map Revision Date(s)	FIRM Effective Date
Town of Portville	Yes	December 20, 1974	April 17, 1978 (Panel 3600930002) July 18, 1983 (Panel 3600930003)	April 17, 1978 (Panel 3600930002B) July 18, 1983 (Panel 3600930003C)
Village of Portville	Yes	May 25, 1973	April 17, 1978	April 17, 1978

The effective FIRM panels for the Town of Portville are dated April 17, 1978, and July 18, 1983. The FIRM panel for the Village of Portville is dated April 17, 1978. These maps show the approximate levee system alignments for the North and South of Dodge Creek levee systems. These two levee systems are mapped as a reducing the hazards of the base flood.

2.3 Upper Allegheny River Watershed BLE

FEMA funded a large-scale BLE project for the Upper Allegheny River Watershed, which includes the Allegheny River and Dodge Creek in the Village of Portville and Oswayo Creek in the Town of Portville. This BLE project is intended to inform future flood hazard mapping updates within the watershed.

BLE is an automated riverine hydrologic and hydraulic (H&H) modeling approach that provides communities with a baseline understanding of their flood risk. It is produced to support the assessment and maintenance of the national flood hazard inventory. The BLE project provides updated information for a large area with a limited level of detail. The resulting flood risk dataset can be used to initiate flood risk awareness discussions. FEMA will release the final report for the Upper Allegheny River Watershed BLE project to the public when it is complete.

2.4 Future Detailed Study

The effective studies for the Allegheny River, Dodge Creek, and Oswayo Creek are detailed studies that identify Special Flood Hazard Areas (SFHAs) using numbered A zones, such as A9, A11, A12, etc. Numbered A zones have published BFEs and can have floodways delineated as well. A detailed (enhanced) study includes updated H&H analysis. The detailed hydraulic analysis may include ground surveys, additional information about stream crossings—such as bridges, and more manipulation of models than the leveraged hydraulic analysis from the BLE project. The analysis for a BLE project is based on more limited information than a detailed study includes. It cannot replace a detailed study because a replacement study must produce at least the level of output shown on the current FIRMs.

In the future, FEMA may fund a detailed study of the Allegheny River and Dodge Creek in the Village of Portville and Oswayo Creek in the Town of Portville. That detailed study would supersede the effective FIS report and FIRMs when it becomes effective.

3 Stakeholder Engagement and Data Collection

3.1 Local Levee Partnership Team

The LLPT is a group of levee stakeholders who provide FEMA with data and information on local levee conditions. They also share feedback on the procedures for analyzing and mapping the levee reach. The stakeholders who participated in the LLPT for this project are listed in Table 3.

Table 3. LLPT Participants

LLPT Member	Contact Information
Todd Shaw	Highway Superintendent, Town of Portville 716-933-8055
Dustin Long	Village of Portville 716-790-2274
Robert Fischer	Planning Board, Village of Portville 716-933-7111
John Kirst	Code Enforcement Officer / Building Inspector, Village of Portville, Town of Portville 716-933-7111
Cathi Gross	Assistant to the Director, Cattaraugus County Emergency Services 716-938-2213; clgross@cattco.org
Mike Burr	Engineering Director, Cattaraugus County Department of Public Works mcburr@cattco.org
Kimberly Merrill	Cattaraugus County Department of Public Works kamerrill@cattco.org
Brienna Wirley	NYSDEC 585-226-5465; Brienna.Wirley@dec.ny.gov
Gregory Stagg	NYSDEC 716-998-1389; Gregory.Stagg@dec.ny.gov
Theodore Myers	NYSDEC Region 9 716-851-7088; Theodore.Myers@dec.ny.gov
Kerrie O’Keeffe	NYSDEC Region 9 716-851-7070; Kerrie.Okeeffe@dec.ny.gov
Mary Binder	NYSDEC, Region 9 585-226-5447; Mary.Binder@dec.ny.gov
Arvind Goswami	NYSDEC, Region 9 518-402-8186; Arvind.Goswami@dec.ny.gov
Brad Wenskoski	NYSDEC 518-402-8280; Brad.Wenskoski@dec.ny.gov
Thanuja Singh	NYSDEC 518-402-8142; Thanuja.Singh@dec.ny.gov
Thomas Brown	USACE, Pittsburgh District, Civil Engineer, Levee Safety Program Manager 412-395-7459; thomas.m.brown@usace.army.mil
Joseph Bossard	USACE, Pittsburgh District, Levee Safety Coordinator 412-395-7358; joseph.bossard@usace.army.mil
Jason Fenn	FEMA Region II, Senior Floodplain Specialist, Mitigation Division 212-680-3624; jason.fenn@fema.dhs.gov
Alan Springett	FEMA Region II, Senior Engineer, Risk Assessment Lead 212-680-4342; alan.springett@fema.dhs.gov
Jose Davila	FEMA Region II jose.davila@fema.dhs.gov

LLPT Member	Contact Information
Nick Mueller	STARR II, FEMA Technical Support Provider, Technical Lead 513-842-8239; nick.mueller@stantec.com
Trevor Cone	STARR II, FEMA Region II Regional Service Center 646-490-3929; trevor.cone@stantec.com
Stephanie Nurre	STARR II, FEMA Technical Support Provider, Project Manager 312-262-2284; stephanie.nurre@stantec.com
Matt Kroneberger	<i>Resilience Action Partners</i> , Outreach Provider 212-237-6373; matt.kroneberger@ogilvy.com

3.2 Data Collection

Through the stakeholder coordination and data collection process, FEMA asked the LLPT for any available data, information, and documentation associated with the levee systems.

Table 4 provides a summary of the data and documentation collected during the stakeholder coordination and data collection process. The data is included in Appendix D.

Table 4. Data Collection Summary

Data Type	Associated Levee System(s)	Data Description	Source	Date Developed or Obtained
Effective Flood Insurance Study	North of Dodge Creek Levee System, South of Dodge Creek Levee System	Cattaraugus County, Town of Portville, New York	FEMA Map Service Center	July 1983
Effective Flood Insurance Study	North of Dodge Creek Levee System, South of Dodge Creek Levee System	Cattaraugus County, Village of Portville, New York	FEMA Map Service Center	October 1977
BLE Project, Upper Allegheny River Watershed	North of Dodge Creek Levee System, South of Dodge Creek Levee System	BLE Upper Allegheny River Engineering Analysis (HEC-RAS)	STARR II	2019 (Obtained)
Topography	North of Dodge Creek Levee System, South of Dodge Creek Levee System	Topographic LiDAR, FEMA 2-Meter Digital Elevation Model (DEM)	New York State GIS Clearinghouse	2019 (Obtained)
Topography	North of Dodge Creek Levee System, South of Dodge Creek Levee System	Top of Levee Elevations	USACE NLD	2020 (Obtained)
Hydrologic Data	North of Dodge Creek Levee System, South of Dodge Creek Levee System	Streamstats Web Application, Magnitude and Frequency of Floods in New York, USGS 2006-5112	USGS	2020

3.3 LLPT Meeting 1

A FEMA project team met with levee stakeholders at the first LLPT meeting on September 25, 2019. The meeting was held at the Olean Municipal Building. The overall intent of the meeting was to gain local insight on the status of the levee systems and confirm the stakeholders who would like to take part in the LLPT. The meeting also discussed the data available for the levee systems and introduced the Analysis and Mapping Procedures for Non-Accredited Levee Systems. More details about the LLPT meeting are in Appendix A.

3.4 LLPT Meeting 2

LLPT Meeting 2, for FEMA's project team and levee stakeholders, was held via webinar on June 8, 2020. The meeting built upon the discussions in LLPT Meeting 1. The FEMA project team also updated the LLPT on the progress of data collection and the initial data analysis. The potential flood hazard areas from the Natural Valley Procedure were shared with the stakeholders. Additionally, the LLPT discussed future map updates and potential options for identifying and mapping the levee flood hazard on future FIRMs. More details about the LLPT meeting are in Appendix A.

3.5 LLPT Meeting 3

The FEMA project team held a webinar for LLPT Meeting 3 with levee stakeholders on July 13, 2020. The meeting built on discussions from LLPT Meeting 2. The FEMA project team discussed this draft Levee Analysis and Mapping Plan and shared an overview of the mapping update process. More details about the LLPT meeting are included in Appendix A.

4 Initial Data Analysis

4.1 Understanding Existing Conditions

The effective hydraulic studies for the Allegheny River and Oswayo Creek were developed using the HEC-2 hydraulic modeling program. The water surface profile for Dodge Creek was developed using the Soil Conservation Service WSP-2 water surface program.² The hydraulic models for the Allegheny River, Dodge Creek, and Oswayo Creek are no longer available. The HEC-2 and WSP-2 hydraulic modeling programs are also not used for new studies.

The Upper Allegheny River Watershed BLE project used the USACE HEC-RAS hydraulic modeling program for stream analysis. The HEC-RAS hydraulic models for the Allegheny River, Dodge Creek, and Oswayo Creek were leveraged to conduct the initial data analysis of the levee systems. The initial data analysis provided a first-pass estimate of the potential BFEs and inundation areas associated with the levee systems.

The North and South of Dodge Creek levee systems are currently shown as providing flood risk reduction from the base flood on the effective FIRMs.

² U. S. Department of Agriculture, Soil Conservation Service, WSP-2 Water Surface Profiles (Generalized Computer Program), May 1976.

4.2 Hydrologic and Hydraulic Analyses

The Upper Allegheny River Watershed BLE project was leveraged as the baseline conditions for the initial data analysis. The BLE project included the following methodology:

- Topographic data processing of publicly available Light Detection and Ranging (LiDAR);
- Hydrologic analysis using gridded input parameters, rural regression equations, and gage analysis, if applicable;
- Basin-wide hydraulic analysis (HEC-RAS) and generation of approximate floodplain mapping; and
- Structure data based on the National Bridge Inventory.

As part of the initial data analysis, STARR II modified the BLE project's HEC-RAS hydraulic models for the Allegheny River, Dodge Creek, and Oswayo Creek. The modifications included estimating the channel geometry and adding channel manning's roughness values. This analysis is referred to as "modified BLE model" in this levee plan.

The modified BLE model was updated to reflect the "with levee" condition. This "with levee" modified BLE model does not allow flow on the landside of the levee system for estimated levee crests elevated above the base flood. The "with levee" condition may produce higher water surface elevations than the traditional Natural Valley Procedure, which allows flow on either side of the levee. The "with levee" condition is used to estimate the BFEs on the levee system's riverside and is used for estimating minimum freeboard requirements. Additional details regarding the modified BLE model can be found in the profile comparison exhibits and technical memorandum in Appendix E.

The BLE project's flood hazard information has a lower resolution than the effective studies of the Allegheny River, Dodge Creek, and Oswayo Creek; therefore, the BLE project cannot be incorporated as effective data. Only future detailed studies would supersede the currently effective information. The results of the initial data analysis for the Allegheny River, Dodge Creek, and Oswayo Creek are non-regulatory, therefore, but they help inform users of potential flood risk and the scope of future detailed analyses. These results should not be used for regulatory activities. If a restudy is funded in the future, FEMA will reengage the community throughout the restudy and mapping process.

4.3 Computation of Freeboard

The base flood profile of the Allegheny River, Dodge Creek, and Oswayo Creek from the "with levee" modified BLE model was used to estimate minimum freeboard, per the requirements of 44 CFR §65.10 (b)(1)(i), which include:

- "... a minimum freeboard of three feet above the water-surface level of the base flood."
- "An additional one foot above the minimum is required within 100 feet on either side of structures (such as bridges) riverward of the levee or wherever the flow is constricted."

- “An additional one-half foot above the minimum at the upstream end of the levee, tapering to not less than the minimum at the downstream end of the levee, is also required.”

The base flood profile of the Allegheny River, Dodge Creek, and Oswayo Creek were plotted against the levee crest elevations to estimate if the levee crest met minimum freeboard requirements.

The levee crest elevations for the North and South of Dodge Creek Levee systems came from the USACE NLD data. The approximate freeboard comparison exhibits are provided in Appendix B. The exhibits show that each levee system may be freeboard deficient and not meet the minimum freeboard requirements of 44 CFR §65.10 (b)(1)(i).

It should be noted that the freeboard comparison was performed using the first-pass data from the “with levee” modified BLE model. The results of the first-pass analysis do not supersede those of the effective FIS report, FIRM, and applicable LOMRs for the Allegheny River, Dodge Creek, and Oswayo Creek; they are intended for discussion and risk awareness purposes and to inform future detailed studies.

A future detailed study of Allegheny River, Dodge Creek, and Oswayo Creek may change the BFE, which would revise minimum freeboard requirements. Additionally, the levee crest elevations for the freeboard comparison are based on available levee crest elevation data from the NLD. A future field survey of the levee crest, which would be the responsibility of the levee sponsor if they choose to do so, may produce results different from this freeboard comparison. A field survey of the levee crest would facilitate the future application of an appropriate levee analysis and mapping procedure.

4.4 Potential Levee Reach Analysis Procedures

One component of the Analysis and Mapping Procedures for Non-accredited Levees is to define appropriate segmentation of levee systems and reaches to identify potential mapping approaches for each reach, based on available data and conditions.

A levee system is a hydraulically independent flood hazard-reduction system that consists of a levee, or levees, and associated structures, such as closure and drainage devices, which are constructed and operated in accordance with sound engineering principles. A levee reach is any continuous section of a levee system to which a single reach analysis procedure may be applied. Based on the available data and the initial data analysis, the North of Dodge Creek Levee system and the South of Dodge Creek Levee system are being considered separate reaches.

Potential reach analysis procedures are described in FEMA’s *Guidance for Flood Risk Analysis and Mapping, Levees*. The reach analysis procedures include Sound Reach, Freeboard Deficient, Overtopping, Structural-Based Inundation, and Natural Valley procedures. These procedures may be assigned for separately defined levee reaches of a levee system.

Each procedure requires the use of different components of data from 44 CFR §65.10. A high-level summary of the levee data required for each procedure and the data available for the North and South of Dodge Creek Levee systems is shown in Table 5. A checklist of the levee certification data required under 44 CFR §65.10 is provided in Appendix C.

Table 5. Levee Data Summary

Levee Data Description	Levee Reach Analysis Procedure					Levee System Data Collected	
	Sound Reach	Freeboard Deficient	Overtopping	Structural-Based Inundation	Natural Valley	North of Dodge Creek Levee System	South of Dodge Creek levee System
Levee Crest Information	Required ³ , BFE + Freeboard Less than Levee Crest	Required ³ , BFE Less than Levee Crest	Required ³	Required ³		NLD levee crest data	NLD levee crest data
O&M Plan, Emergency Action Plan	Required ³	Required ³	Required ³	Recommended		No	No
Certified As-Built Plans	Required ³	Required ³	Required ³			No	No
Structural Design Requirements ⁴	Required ³	Required ³	Required ³			No	No
Inspection Plan/ Inspection Reports	Required ³	Required ³	Required ³	Recommended		No	No
Evaluation of overtopping Erosion Potential			Required ³			No	No

³ Data required from levee stakeholder.

⁴ Structural design requirements include: freeboard, closures, embankment protection, embankment and foundation stability analyses, settlement analyses, and interior drainage. These requirements are according to 44 CFR §65.10(b). A checklist of the levee certification data required under 44 CFR §65.10 is provided in Appendix C.

The zones mapped landward of the levee also vary. The Sound Reach and Freeboard Deficient procedures may result in mapping the flood risk as Zone D. Overtopping and Structural-Based Inundation procedures may result in a combination of a landward SFHA and Zone D. The Natural Valley procedure results in a landward SFHA. Interior drainage may also be mapped as SFHAs if it is shown to be the dominant source of flooding for an area.

5 Potential Analysis Methods

A brief description of the various methods available to study the Portville LFPP levee systems based on FEMA guidance, are presented below. A brief evaluation of the appropriateness of each procedure is presented; it focuses primarily on the levee data available and the BFEs from the “with levee” modified BLE model. The appropriateness of each procedure may change based on future levee data and the results of detailed studies of the Allegheny River, Dodge Creek, and Oswayo Creek.

5.1 Sound Reach

A Sound Reach is a continuous reach of a levee system that has been designed, constructed, and maintained to withstand the flood hazards posed by a base flood. Sound Reaches differ from an accredited levee system because they are a part of a levee system that cannot meet accreditation requirements.

Based on the initial data analysis, each levee system is considered a separate reach. The Sound Reach analysis would not apply. If the entire levee system meets the requirements of 44 CFR §65.10, it could be considered for accreditation.

5.2 Freeboard Deficient

The Freeboard Deficient Procedure can be applied if the levee crest is above the BFE, but does not meet minimum freeboard requirements. A Freeboard Deficient Reach must meet structural requirements, O&M, and inspection standards.

As with the Sound Reach Procedure, no reach-specific modeling is required for a Freeboard Deficient Reach. However, SFHAs from the system-wide interior drainage analysis, and/or adjacent levee reaches, may still be delineated landward of Freeboard Deficient Reaches.

Based on the initial data analysis, the levee crest elevation for the North of Dodge Creek Levee system is above the BFE. The levee crest may also meet minimum freeboard requirements, except for the Main Street crossing of Dodge Creek and near the upstream end of the levee system; therefore, the Freeboard Deficient Procedure may apply. Because as-built plans were not available for review as part of this project, the status of a closure structure for Main Street is unclear.

The levee crest elevation for the South of Dodge Creek Levee system is above the BFE but does not meet minimum freeboard requirements; therefore, the Freeboard Deficient Procedure may apply.

5.3 Overtopping

The Overtopping Procedure can be considered when the BFE is above the levee crest for a reach but the levee is designed to withstand the forces of overtopping. The levee sponsor must provide technical justification that the base flood event will not cause structural failure. In addition to the structural standards established in 44 CFR §65.10, more detailed structural analysis may be required to justify the levee system's ability to sustain the impact of a base flood overtopping the levee. As with the Sound Reach and Freeboard Deficient Reach procedures, an O&M Plan and documentation of inspection are required.

For an Overtopping Reach, technical analyses are performed to determine the volume of water that will overtop the levee during the base flood event. This volume of water is used to establish the inundation area of the SFHA on the landside of the levee system.

Based on initial data analysis, the North of Dodge Creek Levee system may not be overtopped by floodwater at the BFE for the Allegheny River or Dodge Creek. The South of Dodge Creek Levee system may not be overtopped by the Allegheny River, Dodge Creek, and Oswayo Creek. Once detailed analyses of the Allegheny River, Dodge Creek, and Oswayo Creek are available, the freeboard estimate of the levee systems should be updated. If the levee systems are overtopped and the levee sponsor provides the additional data listed in Table 5, the Overtopping Analysis may be performed. As these levee systems may not have been designed to be overtopped, the overtopping analysis may not be applicable without redesign and construction.

5.4 Structural-Based Inundation

In some instances, levee systems have reaches with either known structural deficiencies or unknown structural integrity (a common occurrence for older levee systems). Levee systems with structural integrity issues may provide some flood risk reduction by impeding conveyance to some degree.

It is not possible to predict the exact location of a levee breach. This procedure neither predicts the probability of failure at any breach location, nor provides a specific determination or evaluation of the overall levee system performance. It also does not require a determination of the potential failure mechanism. The procedure results in the development of a reach-specific SFHA that might occur from potential breaches along a specific levee system during the base flood. To determine this SFHA, FEMA will consider possible locations of system breaches, geometry, and failure duration. Known structural deficiencies can be used to help guide the location of the theoretical breaches for Structural-Based Inundation areas.

Once detailed analysis of the Allegheny River, Dodge Creek, and Oswayo Creek are available, the freeboard estimate of the levee systems can be updated. If the levee systems are not significantly overtopped by Allegheny River, Dodge Creek, or Oswayo Creek, FEMA may perform the Structural-Based Inundation Analysis.

General practice is to perform such breach scenarios using a two-dimensional model. This may provide information that some areas within a certain radius from any levee breach will be subject to greater forces due to localized flood velocity increases in breach scenarios. Areas near levees are at greater risk due to this velocity increase.

5.5 Natural Valley Procedure

FEMA evaluates the Natural Valley Procedure for all levee systems to estimate area that would be affected if the levee system does not reduce flood risk due to the base flood. FEMA refers to this area as the “levee impacted area.”

The modified BLE model considers the levee as reducing the flood risk from the base flood. The base flood inundation associated with the Natural Valley Procedure was estimated by extending the “with levee” BFEs landward of the levee into the levee-impacted area. This may produce a more conservative (larger) inundation area than the traditional Natural Valley Procedure; however, for the first-pass estimate it is an appropriate level of detail.

The results of the Natural Valley Procedure and the estimated inundation mapping are shown in Figure 2 for the North of Dodge Creek Levee system. Figure 3 shows the Natural Valley Procedure for the South of Dodge Creek Levee system along the Allegheny River, Dodge Creek, and Oswayo Creek.

For a more detailed description of the potential analysis methodologies, please refer to FEMA’s *Guidance for Flood Risk Analysis and Mapping, Levees*.

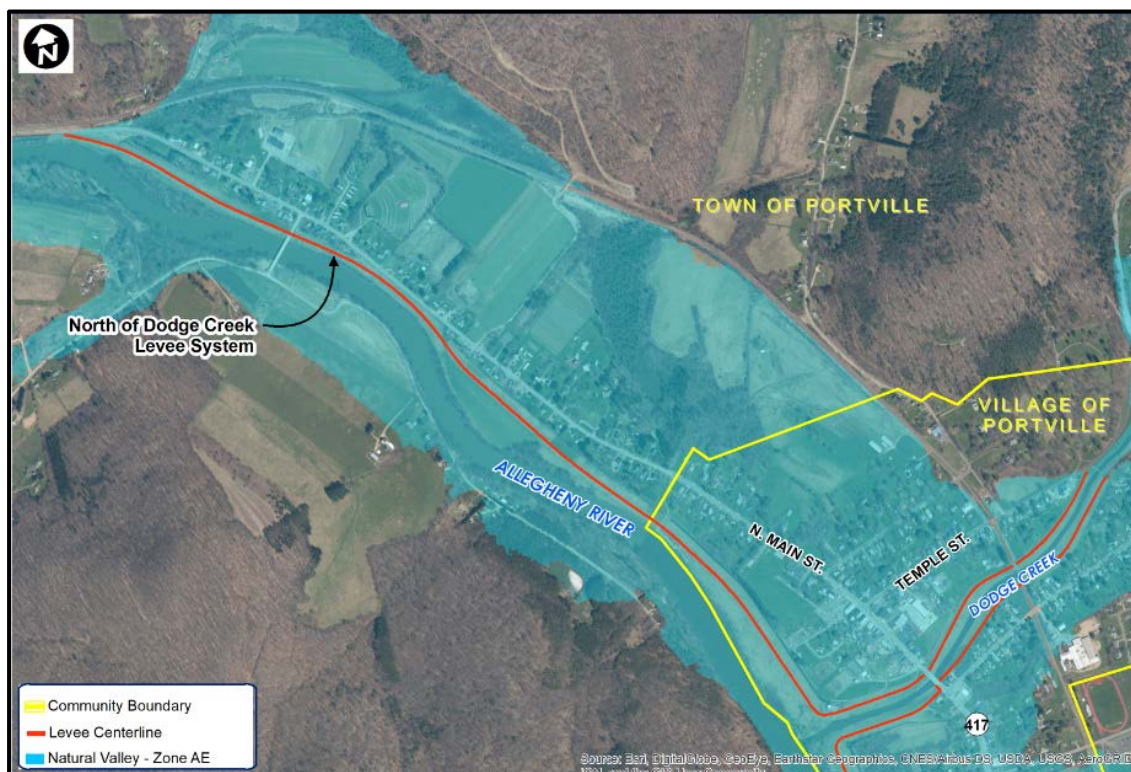


Figure 2: Natural Valley Procedure, North of Dodge Creek Levee System

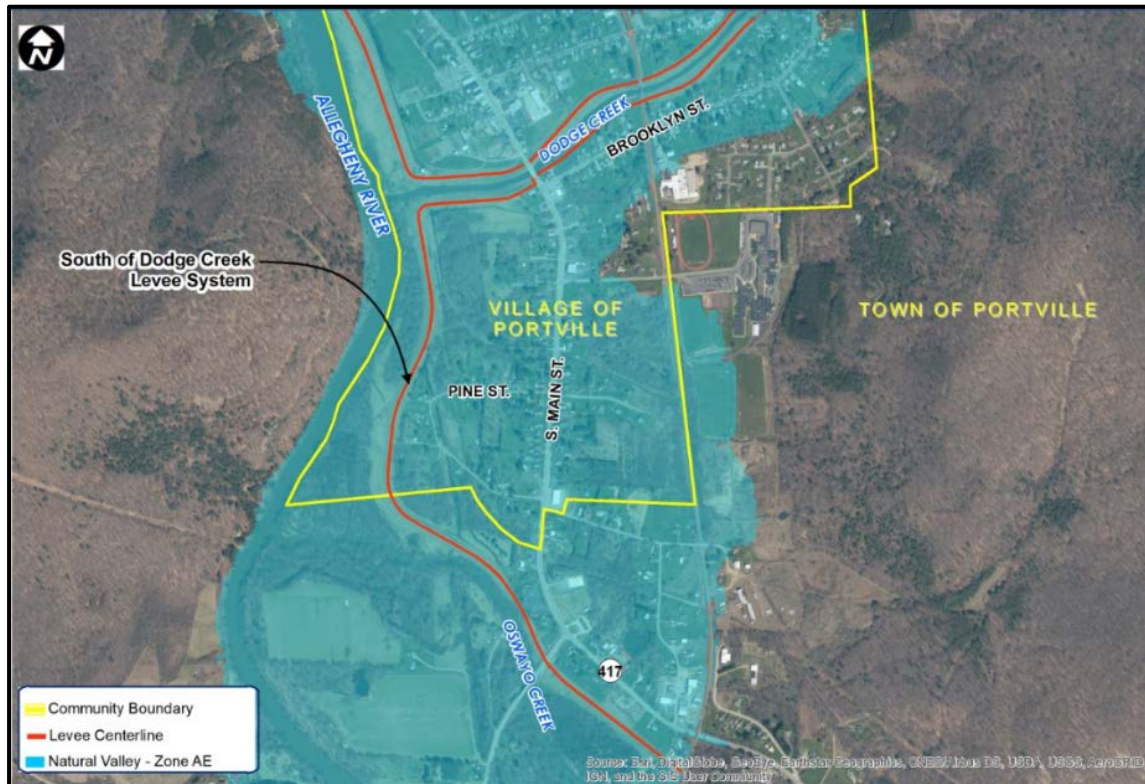


Figure 3: Natural Valley Procedure, South of Dodge Creek Levee Systems

6 Path Forward and Next Steps

The information in this levee plan provides the community with a tool it can use for planning and to increase flood risk awareness. This levee plan will also facilitate scoping of a flood mapping project, FEMA has not funded a mapping project at this time. A mapping project will require additional data collection, information gathering, levee owner coordination, detailed hydraulic analysis, and due process. The timetable for a potential project has not been determined as of the completion of this study; however, initiation of a mapping project is anticipated within the next few years.

Members of the LLPT will be included in future outreach to determine what, if any, changes have taken place with respect to existing or future conditions that may have an impact on the findings of the Analysis and Mapping Procedures for Non-Accredited Levee Systems summarized in this plan.

For future mapping to show the North and South of Dodge Creek levee systems as reducing the flood hazard during the base flood, the Town and Village of Portville will need to provide certified levee data compliant with 44 CFR §65.10 to FEMA.

If the levee systems cannot meet the requirements of 44 CFR §65.10, the flood hazard behind the levee systems may be mapped using a Levee Reach Analysis Procedure from the Analysis and Mapping Procedures for Non-accredited Levees. Certified levee data that complies with 44 CFR §65.10 and the Levee Reach Analysis Procedure being requested would be required for the Sound

Reach, Freeboard Deficient, and Overtopping Procedures. The resulting flood risk on the landside of the levee system may be shown as a composite of Zone D and Zone AE SFHAs.

A certified levee data package may be incorporated into future mapping if FEMA receives it and confirms it meets the requirements of 44 CFR §65.10 before the end of the 90-day appeals period after the Preliminary FIRM is released. It is important to note that this data may also be submitted at any time using the LOMR process. If no data or incomplete levee certification data is provided, the levee system would be shown as non-accredited.

7 References

Esri: *World Imagery*, DigitalGlobe, GeoEye, i-cubed, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

FEMA: *Flood Insurance Study*, Town of Portville, New York, Cattaraugus County, July 18, 1983

FEMA: *Flood Insurance Study*, Village of Portville, New York, Cattaraugus County, April 17, 1978

FEMA: *Analysis and Mapping Procedures for Non-Accredited Levee Systems*, July 2013

FEMA: *Guidance for Flood Risk Analysis and Mapping, Base levee Engineering (BLE) Analyses and Mapping*, February 2018

FEMA: *Guidance for Flood Risk Analysis and Mapping, Levees*, November 2019

USACE: National Levee Database (<https://levees.sec.usace.army.mil/#/>), 2020

New York State GIS Clearinghouse: FEMA 2-Meter Digital Elevation Model (DEM), Available at: <https://gis.ny.gov/elevation/>

Base Level Engineering Analysis, Region II Upper Allegheny River Watershed (HUC8- 05010001)
MIP Case No. 19-02-0035S Deliverable Dated: November 30, 2019

Appendix A

Stakeholder Engagement - LLPT Meeting Information

Appendix B

Freeboard Profile Comparison

Appendix C

Levee Accreditation Checklist

Appendix D

Collected Data

(Digital data provided via FTP)

Appendix E

Initial Data Analysis

(Digital data provided via FTP)